Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

BNC 50 ohm Adapters

Fig. 1



BNC Straight Adapters - Jack/Jack
31-219
31-219-RFX

Fig. 2



BNC Straight Adapters - Plug/Plug
31-218
31-218-RFX

Fig. 3



BNC Angle Adapters - Jack/Plug
31-9
31-9-RFX

Fig. 4

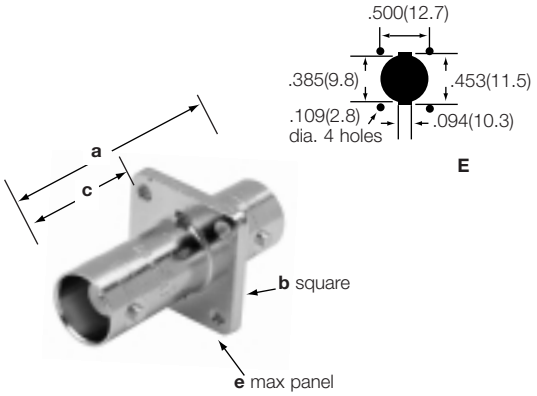

BNC Panel Adapter - Jack/Jack
47000

BNC ADAPTERS - STRAIGHT, ANGLE, PANEL MOUNT

Description		Dimensions, inches (millimeters)				Notes		Mtg. Hole	Military Number	Amphenol Number	Fig.	
		a	b	c	e	Plt.	Ins.					
Straight	Jack-Jack	1.28(32.5)	.437(11.1)	—	—	P1	D1	—	UG-914/U	**31-219***	1	▲
						P7	D26	—	—	**31-219-RFX**	1	▲
Straight	Plug-Plug	1.25(31.8)	.562(14.3)	—	—	P1	D1	—	UG-491A/U	**31-218***	2	▲
						P7	D1	—	—	**31-218-RFX**	2	
Angle	Jack-Plug	1.06(27.0)	.562(14.3)	1.02(25.8)	—	P1	D1	—	UG-306/U	**31-9*‡**	3	▲
		1.06(27.0)	.562(14.3)	1.02(25.8)	—	P1	D1	—	—	**31-9-RFX**	3	▲
		1.09(27.6)	.594(15.1)	1.02(25.8)	—	P34	D1	—	M55339/14-00306	**31-4561**	3	
Panel, 3-56 Tapped Flange Holes	Jack-Jack	1.28(32.5)	.688(17.5)	.691(17.6)	.250(6.4)	P1	D1	E	—	**47000***	4	

* recognized under the component program of U.L., Inc. ▲ distributor stocked ‡ IBM 6028521